

# CORE TOW TRACTOR



# REAL TOW-IT-ALL

- ▶ 10000 lb. Towing Capacity
- ▶ 8.8 mph Travel Speed Without Load
- ▶ 24-Volt AC Drive System
- ▶ Regenerative Braking



8TB50

# PLENTY OF PULL FOR THE JOB

**THE TOYOTA CORE TOW TRACTOR.** From A to Z, the Core Tow Tractor gets you there. Quickly and efficiently. It's the ideal solution for transporting material and pulling carts through a facility when no vertical lift is required. An AC Drive System, AC Drive Motor and regenerative braking boost productivity and make it simple to maintain. Ready to work? The Core Tow Tractor is.

## CORE TOW TRACTOR ADVANTAGES

- ▶ **24-VOLT AC DRIVE SYSTEM** for optimal performance in the toughest applications
- ▶ **GENEROUS 10000 LB. TOWING CAPACITY**
- ▶ **MULTIFUNCTION CONTROL HANDLE** with ergonomically positioned handgrips for simplified operation of all controls with either hand
- ▶ **TIGHT TURNING RADIUS** advantageous for cramped, busy work environments
- ▶ **AXLE-WELDMENT RUBBER SUSPENSION** system for a smoother ride
- ▶ **QUICK-RELEASE TOW HITCH** option lets operator release carts without leaving operator compartment, streamlining work operations
- ▶ **POWER STEERING** option for effortless steering, improved ergonomics and unmatched control, with speed-sensitive steering and smooth continuous operation
- ▶ **AGV CONVERSION OPTION** equips tow tractor to operate as an Automated Guided Vehicle while still allowing for 100% manual control when needed





10000<sup>LB.</sup>

CAPACITY

---

8.8<sup>MPH</sup>

TRAVEL SPEED  
WITHOUT LOAD

---

24<sup>V</sup>

AC DRIVE SYSTEM

## CORE TOW TRACTOR

TOWING CAPACITY  
**10000 LBS.**

DRAWBAR PULL  
**750 LBS.**

VOLTAGE  
**24**

### INDUSTRIES



Beverage



General  
Manufacturing



General  
Warehousing

## STANDARD FEATURES

### PERFORMANCE

- AC drive motor with thermal protection & current limiting
- 24-Volt electrical system
- Fault code memory with hour meter reading
- Regenerative braking
- Programmable performance
  - Adjustable maximum speed
  - Adjustable acceleration
- On/off key switch
- Multiple hour meter indicator
- Battery discharge indicator
- Fused control & power circuits

### BODY/EXTERIOR DESIGN

- 31.75"-long x 13.44"-wide battery compartment
- SB-175 battery connector (gray)
- Cold storage conditioning
- Wrap-around hand guard
- Control handle with dual brake levers
- Polyurethane torsion block stabilizing casters
- Electronic horn

### ERGONOMICS

- Multifunction control handle with ergonomically angled handgrips & wrap-around hand guard
- Dual thumbwheels with twist grips for directional control & travel speed
- Intuitively positioned lift/lower & horn buttons
- Adjustable height control handle (3-position); dual hand brake levers
- Low-effort control handle
- High-speed interlock button
- Bubble-cushioned operator floor mat, padded backrest & knee pad
- Walk-through operator compartment
- Low platform step height
- Axle weldment rubber suspension system

### DURABILITY

- Control Area Network (CAN-bus) communications
- Welded construction with reinforced heavy-duty bumper
- Powder coat paint finish
- Steel bulkhead wrappers
- High-strength polymer service cover
- Rubber drive tire
- Polyurethane rear wheels (durometer 95)
- Hall-effect switches

### SERVICEABILITY

- AC drive motor (no brushes or commutator)
- One-piece, lightweight service access cover
- Error indicator with self-diagnostics
- Self-adjusting electric disc brake

## OPTIONAL EQUIPMENT

- Electronic travel alarm (forward & reverse)
- Controller splash guard
- Keyless on/off switch
- Power hookup for onboard terminal (24-Volt, 2 amp)
- Power hookup for onboard terminal (24-Volt, 10 amp)
- Storage tray, battery compartment mounted
- Steel bumper skirt (2.25" underclearance)
- Automatic coupler tow hitch
- Pin & clevis tow hitch
- Rubber block suspension system
- 42" tow tractor hitch
- Steering bearing, greaseable
- 6" extended operator compartment
- Battery compartment rollers with dual side gates
- Battery side gate interlock switches
- 32"-high battery retaining wall
- Battery spacer kit
- Polyurethane drive tire
- Non-marking rubber drive tire
- Various drive tire compounds
- Spring-loaded stabilizing casters
- Load wheels (durometer 85)
- Heavy-duty spring-loaded stabilizing casters
- Power steering
- Special paint color, complete truck
- UL-approved model type "E" rating
- UL-approved model type "EE" rating
- Factory pre-programmed maximum travel speed of 5 mph



Please contact your local, authorized Toyota Dealer for a complete list of available options.



# TRUCK SPECIFICATIONS

GENERAL DATA			MODEL NUMBER	
			<b>8TB50</b>	
Load Capacity	lb (kg)		10000 (4540)	
Power Type			Battery	
Operator Position			Center-Controlled Rider	
Tire Type	Drive / Caster / Load		Rubber / Polyurethane / Polyurethane	
Wheels (x = driven)	Front / Rear		1 Drive, 2 Casters / 2 Rear	
EXTERIOR DIMENSIONS			8TB50	
<b>A</b> Overall Width	in (mm)		32.5 (826)	
<b>B</b> Overall Length	in (mm)		53.25 (1353)	
<b>C</b> Wheelbase	in (mm)		37.38 (949)	
<b>D</b> Turning Radius	in (mm)		47.25 (1200)	
<b>E</b> Power Unit Height	in (mm)		31.4 (798)	
<b>F</b> Overall Height (handle)	Position 1	in (mm)	56.0 (1422)	
	Position 2	in (mm)	53.0 (1346)	
	Position 3	in (mm)	49.8 (1285)	
<b>G</b> Operator's Platform Height	in (mm)		8.3 (211)	
<b>H</b> Operator's Platform Depth	in (mm)		15.8 (401)	
<b>I</b> Distance from Bumper to Center of Drive Tire	in (mm)		9.9 (251)	
<b>J</b> Bumper Underclearance	in (mm)		4.75 (121)	
<b>K</b> Bumper Height	in (mm)		9.75 (248)	
Gross Weight Without Battery	lb (kg)		1190 (540)	
PERFORMANCE DATA			8TB50	
Travel Speed	Full Load	mph (km/h)	5.8 (9.3)	
	No Load	mph (km/h)	8.8 (14.2)	
Drawbar Pull	Continuous	lb (kg)	250 (114)	
	Maximum	lb (kg)	750 (341)	
TIRES			8TB50	
Tires	Number	Front / Rear	3 / 2	
	Size (dia. x width)	Drive (front)	in (mm)	12 x 4.75 (305 x 121)
		Caster (front)	in (mm)	4 x 2.5 (102 x 64)
		Rear	in (mm)	6 x 3.25 (152 x 82)
POWER SYSTEM			8HBC30	
Battery	Voltage/Capacity	V / Ah	24 / 750	
	Connector (Color)		SB-175 (gray)	
	Connector Cable Location		B	
	Connector Cable Length	in (mm)	18 (457)	
Battery Compartment	Width	in (mm)	31.5 (800)	
	Length	in (mm)	13.44 (341)	
	Height	in (mm)	-	
Battery Weight	Maximum	lb (kg)	1500 (680)	
	Minimum	lb (kg)	965 (435)	
Electric Motors	Drive (60 minutes)	hp (kW)	5.5 (4.1)	
Control Type	Drive		-	
	Load Handling		-	

# EXTERIOR DIMENSIONS

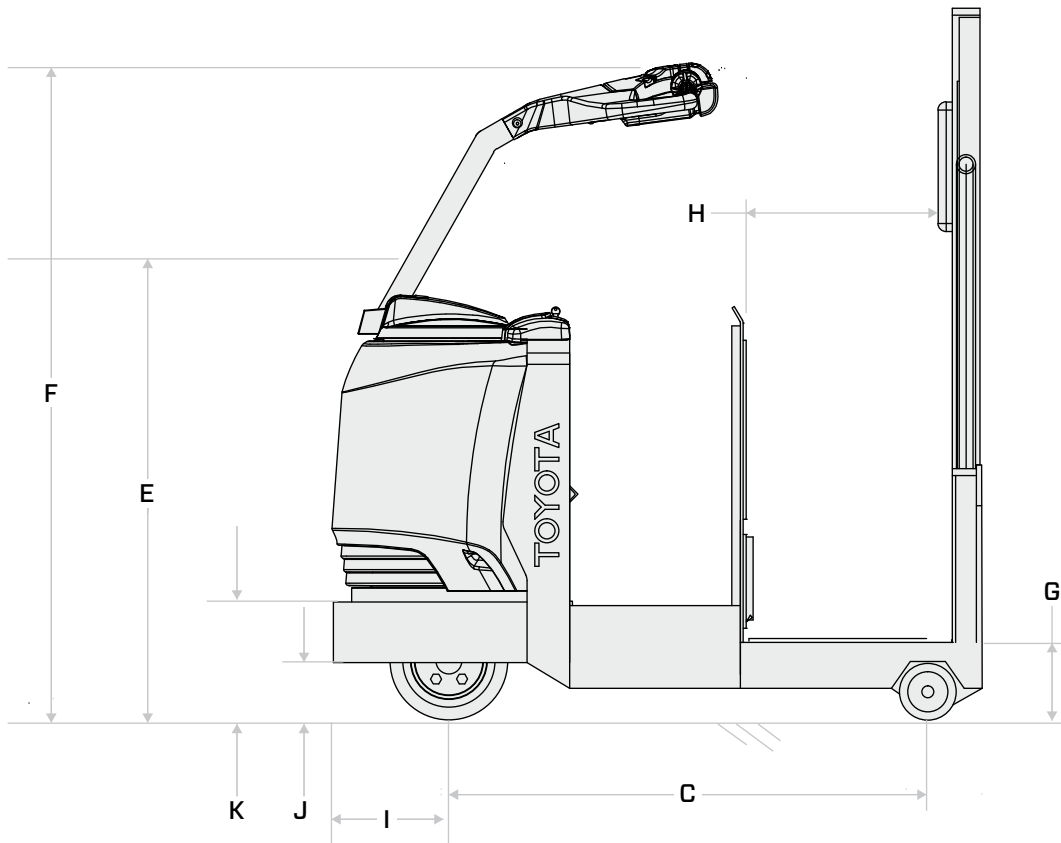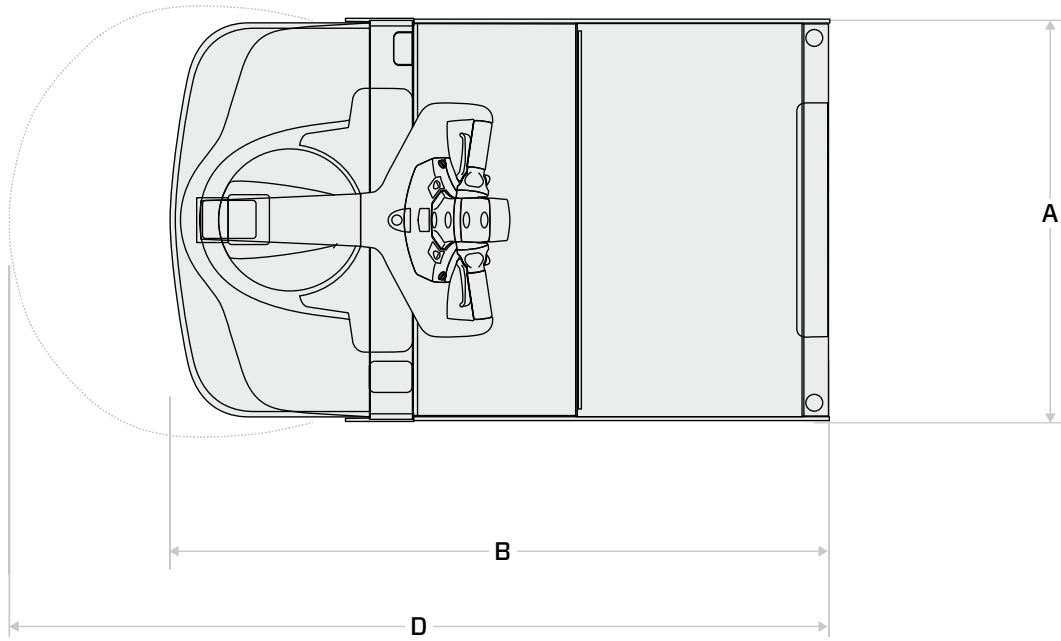





# “THE NAME ON MY SHIRT SAYS TOYOTA, BUT I WORK FOR YOU.”

Alan – 360 Technician, Atlas Toyota Material Handling, Chicago, IL



## HELP IS ALWAYS HERE WITH TOYOTA 360 SUPPORT.

The industry’s best and most comprehensive dealer network quickly delivers Toyota Certified Technicians to your work site. These specially trained technicians can also help assess your warehouse and facility needs to recommend the right equipment for the job. And with the largest fleet of used and rental material handling products, Toyota 360 keeps your business running at full speed.

[ToyotaForklift.com/360-Support](http://ToyotaForklift.com/360-Support)



**YOUR BUSINESS IS RIDING ON IT.**

Some product features described herein are optional. Please consult your dealer for specifications. Details of specifications and equipment are based on information available at time of printing and may change without notice.

