



NEW

Snorkel 2100SJ MEGA BOOM

Features

- Reaches a maximum working height of 216 ft. (66.0m)
- Industry leading outreach
- 5 steering modes including lateral steering
- Patent pending secondary platform controls

	NEW 2100SJ
Max. working height	216' (66.0m)
Max. platform height	210' (64.0m)
Max. horizontal reach	115' (35.1m)
Stowed length	51' (15.5m)
Overall width (axles retracted)	8' 2" (2.5m)
Stowed height	10' (3.0m)
Platform capacity (unrestricted)	770 lbs (349kg)
Inside turning radius (axles retracted)	10' (3.0m)
Gradeability	35%
Weight	92,000 lbs (41,730kg)

TELESCOPIC BOOM LIFTS

INTERNAL COMBUSTION ROUGH TERRAIN



Features

- Rough terrain mid-size telescopic boom lifts
- 4-wheel drive, plus tracked all terrain option*
- Available with and without a job boom

	400S	460SJ
Max. working height	46' 2" (14.2m)	52' 1" (16.0m)
Max. platform height	40' 2" (12.2m)	46' 1" (14.0m)
Overall width	7' 7" (2.31m)	7' 7" (2.31m)
Stowed height	7' 10" (2.38m)	7' 10" (2.38m)
Platform capacity (unrestricted)	600 lbs (272kg)	600 lbs (272kg)
Weight	15,730 lbs (7,135kg)	17,260 lbs (7,829kg)
	600S	660SJ
Max. working height	66' (20.3m)	71' 7" (22.1m)
Max. platform height	60' 8" (18.5m)	65' 11" (20.1m)
Overall width	8' 1" (2.46m)	8' 1" (2.46m)
Stowed height	8' 7" (2.61m)	8' 7" (2.61m)
Platform capacity (unrestricted)	600 lbs (272kg)	600 lbs (272kg)
Weight	24,640 lbs (11,176kg)	28,620 lbs (12,982kg)
	NEW 600S ALL TERRAIN	NEW 660SJ ALL TERRAIN
Max. working height	66' 8" (20.5m)	71' 11" (22.1m)
Max. platform height	60' (18.3m)	65' 7" (20.0m)
Overall width	8' 1" (2.46m)	8' 1" (2.46m)
Stowed height	8' 3" (2.51m)	8' 3" (2.51m)
Platform capacity (unrestricted)	600 lbs (272kg)	600 lbs (272kg)
Weight	28,659 lbs (13,027kg)	30,250 lbs (13,750kg)

*Tracked All Terrain model specifications may vary slightly - please refer to 600S/660SJ All Terrain specification sheet for details.

TELESCOPIC BOOM LIFTS

INTERNAL COMBUSTION ROUGH TERRAIN



Features

- Powerful diesel telescopic boom lifts
- Available with and without a job boom
- High torque 4-wheel drive system

	TB80	TB86J
Max. working height	86' (26.4m)	92' (28.2m)
Max. platform height	80' (24.4m)	86' (26.2m)
Max. horizontal reach	71' 2" (21.7m)	78' 3" (23.9m)
Stowed length	38' 8" (11.8m)	42' 3" (12.9m)
Overall width	8' 6" (2.6m)	8' 6" (2.6m)
Stowed height	9' 6" (2.9m)	9' 6" (2.9m)
Platform capacity	500 lbs (227kg)	500 lbs (227kg)
Inside turning radius	7' 10" (2.4m)	7' 10" (2.4m)
Gradeability	40%	40%
Weight	36,332 lbs (16,480kg)	38,690 lbs (17,549kg)
	TB120	TB126J
Max. working height	126' (38.6m)	132' (40.4m)
Max. platform height	120' (36.6m)	126' (38.4m)
Max. horizontal reach	62' (18.9m)	62' 11" (19.2m)
Stowed length	42' 3" (12.9m)	44' 9" (13.6m)
Overall width	8' 7" (2.61m)	8' 7" (2.61m)
Stowed height	9' 10" (3.0m)	10' 5" (3.2m)
Platform capacity	500 lbs (227kg)	500 lbs (227kg)
Inside turning radius	19' (5.8m)	19' (5.8m)
Gradeability	30%	30%
Weight	39,500 lbs (17,917kg)	41,800 lbs (19,000kg)



Designed by Snorkel's in-house engineering team, all Snorkel booms are fitted with Snorkel Guard™ secondary guarding system.


Simple and effective, Snorkel Guard™ features a spring-loaded rail mounted above the upper controls. When the rail is compressed, the machine operation will cut-out.

If the operator is able, they can re-activate the lift using an override switch in the platform. Alternatively, the lift can be operated using the ground controls.

This low maintenance, mechanical system offers additional protection for the operator, without adding any complexity to the lift.

Snorkel Guard™ is fitted as standard to all new build Snorkel boom lifts.

A Snorkel Guard™ retrofit kit is available for purchase, which can be fitted to most existing Snorkel booms in the field.

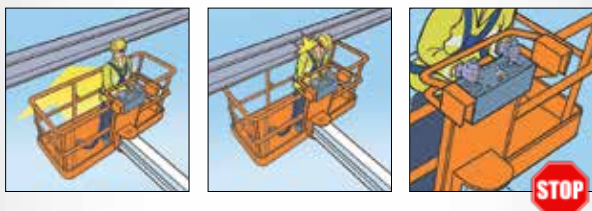

FOR MORE INFORMATION
www.snorkellifts.com

TOWABLE BOOM LIFTS

TOWABLE BOOM LIFTS



Features

- Robust, reliable, and compact towable boom lifts
- Quick to set up and easy to operate
- Simple to service and maintain

	TL37J
Max. working height	41' 9" (12.9m)
Max. platform height	35' 9" (10.9m)
Max. horizontal reach	18' 5" (5.6m)
Towing width	5' 3" (1.61m)
Towing length	20' 11" (6.4m)
Stowed height	6' 11" (2.1m)
Stabilizer footprint	12' 9" x 10' 10" (3.9m x 3.3m)
Superstructure rotation	640° (non-continuous)
Platform capacity	475 lbs (215kg)
Weight (battery model)	3,498 lbs (1,568kg)

	TL39	TL49J
Max. working height	43' 9" (13.5m)	54' 8" (16.7m)
Max. platform height	37' 9" (11.5m)	48' 8" (14.7m)
Max. horizontal reach	21' (6.4m)	27' 10" (8.5m)
Towing width	5' 3" (1.61m)	5' 8" (1.72m)
Towing length	16' 8" (5.1m)	23' 3" (7.1m)
Stowed height	6' 7" (2.01m)	7' 2" (2.16m)
Stabilizer footprint	13' 1" x 11' 10" (4.0m x 3.6m)	15' 9" x 15' 5" (4.8m x 4.7m)
Superstructure rotation	540° (non-continuous)	680° (non-continuous)
Platform capacity	475 lbs (215kg)	425 lbs (200kg)
Weight (battery model)	3,703 lbs (1,680kg)	5,269 lbs (2,389kg)

TELEHANDLERS

INTERNAL COMBUSTION & ELECTRIC ROUGH TERRAIN TELEHANDLERS



Features

- Powerful 4-wheel drive for rough terrain
- Proportional joystick controls for smooth operation
- Zero emission lithium electric version for indoor or outdoor use (SR5719E)

	SR5719	SR5719E
Max. lift height	19' (5.79m)	19' (5.79m)
Max. lift capacity	5,732 lbs (2,600kg)	5,732 lbs (2,600kg)
Max. forward reach	10' 4" (3.1m)	10' 4" (3.1m)
Overall width	6' 2" (1.89m)	6' 2" (1.89m)
Stowed height	6' 4" (1.93m)	6' 4" (1.93m)
Ground clearance	9" (220mm)	9" (220mm)
Length to fork face*	13' 9" (4.19m)	13' 9" (4.19m)
Outside turning radius	10' 8" (3.25m)	10' 8" (3.25m)
Raise / lower time	6.9 / 5 seconds	6.9 / 5 seconds
Weight	10,360 lbs (4,700kg)	10,582 lbs (4,800kg)

	SR9244	SR1054	SR1331
Max. lift height	44' 4" (13.5m)	53' 9" (16.4m)	31' 2" (9.5m)
Max. lift capacity	9,260 lbs (4,200kg)	10,000 lbs (4,535kg)	13,000 lbs (5,869kg)
Max. forward reach	31' 2" (9.5m)	41' 4" (12.6m)	17' 8" (5.4m)
Overall width	7' 6" (2.3m)	7' 6" (2.3m)	7' 7" (2.3m)
Stowed height	8' 5" (2.56m)	8' 5" (2.56m)	8' 5" (2.56m)
Ground clearance	1' 2" (350mm)	1' 2" (350mm)	16" (410mm)
Length to fork face*	21' 2" (6.45m)	21' 8" (6.6m)	20' 2" (6.15m)
Outside turning radius	13' 8" (4.2m)	13' 8" (4.2m)	14' 9" (4.5m)
Raise / lower time	13 / 9.5 seconds	16 / 10.8 seconds	20 / 14 seconds
Weight	24,581 lbs (11,150kg)	26,852 lbs (12,180kg)	24,450 lbs (11,090kg)

*Length from carriage to counterweight

MATERIAL LIFTS

PUSH AROUND MATERIAL LIFTS



Features

- High specification material lifts
- Dual handle, two-speed shift-on-the-fly winch
- Available in heavy-duty construction or low height mini series

	ML12M	ML16M	ML20M
Lift height – forks up	12' 6.5" (3.8m)	16' 1" (4.9m)	19' 8" (6.0m)
Lift height – forks down	10' 10" (3.3m)	14' 5" (4.4m)	17' 11" (5.5m)
Stowed width	30.5" (0.77m)	30.5" (0.77m)	30.5" (0.77m)
Stabilizer width	64" (1.63m)	64" (1.63m)	64" (1.63m)
Stowed length	33" (0.84m)	34.5" (0.88m)	36" (0.91m)
Operating length	5' 8" (1.72m)	6' 1" (1.85m)	6' 11" (2.1m)
Stowed height	5' 3" (1.59m)	5' 3" (1.59m)	5' 3" (1.59m)
Fork width (outside)	23" (0.58m)	23" (0.58m)	23" (0.58m)
Max. load capacity*	700 lbs (318kg)	650 lbs (295kg)	600 lbs (272kg)
Weight	265 lbs (120kg)	298 lbs (135kg)	332 lbs (151kg)
	ML12C	ML18C	ML24C
Lift height – forks up	13' 3" (4.0m)	18' 6" (5.6m)	24' 4" (7.4m)
Lift height – forks down	11' 6" (3.5m)	16' 10" (5.1m)	22' 7" (6.9m)
Stowed width	30.5" (0.77m)	30.5" (0.77m)	30.5" (0.77m)
Stabilizer width	64" (1.63m)	64" (1.63m)	64" (1.63m)
Stowed length	2' 9" (0.85m)	2' 9" (0.85m)	2' 9" (0.85m)
Operating length	5' 2" (1.75m)	6' 1" (1.86m)	6' 9" (2.06m)
Stowed height	7' 2" (2.2m)	7' 2" (2.2m)	7' 2" (2.2m)
Fork width (outside)	23" (0.58m)	23" (0.58m)	23" (0.58m)
Max. load capacity*	750 lbs (340kg)	700 lbs (318kg)	650 lbs (295kg)
Weight	245 lbs (111kg)	310 lbs (141kg)	358 lbs (162kg)

*14" (0.36m) load center

MATERIAL LIFTS

PUSH AROUND MATERIAL LIFTS



Features

- High specification material lifts
- Can pass through a standard doorway
- Robust, industrial grade





	ML5I	ML10I	ML15I
Lift height – forks up	6' 5" (2.0m)	11' (3.4m)	15' 8" (4.8m)
Lift height – forks down	4' 8" (1.4m)	9' 4" (2.7m)	13' 11" (4.3m)
Stowed width	30.5" (0.77m)	30.5" (0.77m)	30.5" (0.77m)
Stabilizer width	5' 4" (1.63m)	5' 4" (1.63m)	5' 4" (1.63m)
Stowed length	2' 9" (0.85m)	2' 9" (0.85m)	2' 9" (0.85m)
Operating length	5' 2" (1.57m)	5' 2" (1.57m)	5' 7" (1.7m)
Stowed height	6' 3" (1.9m)	6' 3" (1.9m)	6' 3" (1.9m)
Fork width (outside)	23" (0.58m)	23" (0.58m)	23" (0.58m)
Max. load capacity*	1,000 lbs (454kg)	900 lbs (408kg)	800 lbs (363kg)
Weight	197 lbs (89kg)	234 lbs (106kg)	270 lbs (122kg)

	ML20I	ML25I
Lift height – forks up	20' 3" (6.2m)	24' 11" (7.6m)
Lift height – forks down	18' 6" (5.7m)	23' 2" (7.1m)
Stowed width	30.5" (0.77m)	30.5" (0.77m)
Stabilizer width	5' 4" (1.63m)	5' 4" (1.63m)
Stowed length	6' 5" (0.8m)	6' 5" (0.8m)
Operating length	6' 3" (1.96m)	6' 3" (1.96m)
Stowed height	6' 2" (1.9m)	6' 2" (1.9m)
Fork width (outside)	23" (0.58m)	23" (0.58m)
Max. load capacity*	750 lbs (340kg)	600 lbs (272kg)
Weight	332 lbs (150kg)	368 lbs (167kg)

*14" (0.36m) load center

ACCESSORY PACKAGES

CUSTOMIZE YOUR SNORKEL LIFT

															
Telescopic Booms															
400S	-	X	X	X	X	X	X	X	X	12kW	X	-	-	-	-
460SJ	-	X	X	X	X	X	X	X	X	12kW	X	-	-	-	-
600S	-	X	X	X	X	X	X	X	X	12kW	X	-	-	X	-
660SJ	-	X	X	X	X	X	X	X	X	12kW	X	-	-	-	-
600S All Terrain	-	X	X	X	X	X	X	X	X	12kW	X	-	-	-	-
660SJ All Terrain	-	X	X	X	X	X	X	X	X	12kW	X	-	-	-	-
TB80	-	-	-	X	X	X	X	X	X	12kW	X	-	X	-	-
TB86J	-	-	-	X	X	X	X	X	X	12kW	X	-	X	-	-
TB120	-	-	-	X	X	X	X	X	X	12kW	X	-	X	-	-
TB126J	-	-	-	X	X	X	X	X	X	12kW	X	-	X	-	-
2100SJ	-	-	-	X	X	X	X	X	X	12kW	X	-	-	-	X
Articulated Booms															
A46IE	-	X	X	X	X	X	X	X	X	-	-	-	-	-	-
A46JRT	-	X	X	X	X	X	X	X	X	-	-	-	-	X	-
A60JRT	-	X	X	X	X	X	X	X	X	-	-	-	-	X	-
600AJN	-	X	X	X	X	X	X	X	X	-	-	-	-	X	-
AB60J	-	X	X	X	X	X	X	X	X	-	-	-	-	X	-
AB80J	-	X	X	X	X	X	X	X	X	12kW	X	-	X	-	-
AB85J	-	X	X	X	X	X	X	X	X	12kW	X	-	X	-	-
Speed Level															
SL26RT	-	-	-	-	-	-	-	-	X	-	-	-	X	-	-
SL30RT	-	-	-	-	-	-	-	-	X	-	-	-	X	-	-
SL26RTE	-	-	-	-	-	-	-	-	X	-	-	-	X	-	-
SL30RTE	-	-	-	-	-	-	-	-	X	-	-	-	X	-	-
Scissor Lifts															
S321SL	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-
S321SE	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-
S3219E	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-
S3220E	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-
S3226E	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-
S4726E	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-
S4732E	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-
S4740E	X	-	-	-	-	-	-	-	-	-	-	-	-	-	-
S225SRT	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S275SRT	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S225SBE	-	-	-	X	-	-	-	-	-	-	-	-	-	-	X
S275SBE	-	-	-	X	-	-	-	-	-	-	-	-	-	-	X
S225SRTE	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S275SRTE	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S2770RT	-	-	-	X	-	-	-	-	-	-	-	-	-	-	X
S3370RT	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S3970RT	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S2770BE	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S3370BE	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S3970BE	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S9033RT	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S9043RT	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S9053RT	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S9031RT-HC	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S9043RT-HC	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S9056RT-HC	-	-	-	X	-	-	-	-	-	-	-	-	-	-	-
S9070RT-HC	-	-	-	X	-	-	-	-	-	-	-	-	-	-	X
TL37J	-	-	-	-	-	-	-	-	-	-	-	-	-	-	X
TL49J	-	-	-	-	-	-	-	-	-	-	-	-	-	-	X

ELECTRIC SLAB SCISSOR LIFTS

- Designed by a rental guy and built to last
- Packed with innovative features that deliver low total ownership costs




Saloon door-style entry gates as standard

Rigidly mounted upper controls to reduce loss & theft (equipped with a power outlet)

Dual shear scissor design for increased stack rigidity

Industry's largest kingpins require no maintenance

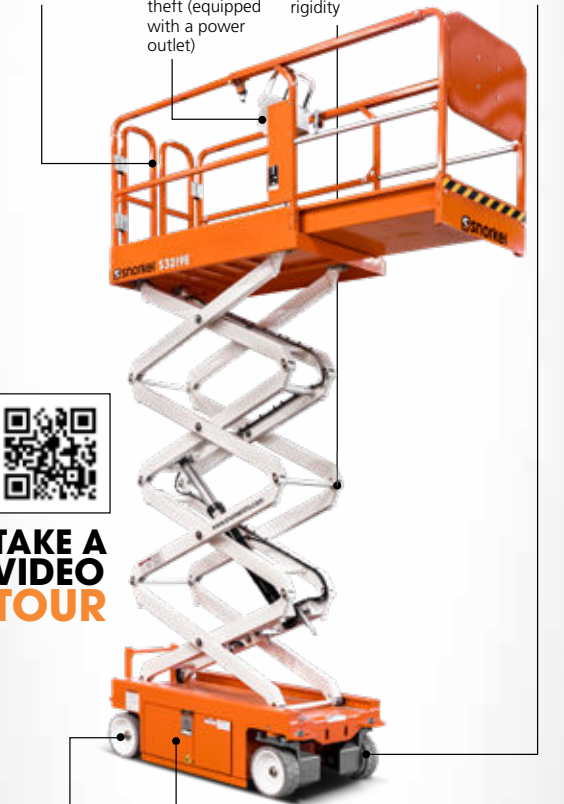

TAKE A VIDEO TOUR



Single wheel nut reduces maintenance costs

On-board diagnostics minimize service calls

Twin door component trays for access, even in confined spaces

"Inside out" maintenance design for easy access to components

Snorkel[™]

FOR MORE INFORMATION

www.snorkellifts.com

SCISSOR LIFTS

PUSH AROUND & SELF-PROPELLED MINI LIFTS



Snorkel S3010E

Snorkel S3210E

Features

- Lightweight push around and self-propelled mini scissor lifts
- Easily passes through a standard doorway
- Durable design for tough site conditions

	S3006P	S3008P	S3010P
Max. working height	12' 6" (4.0m)	14' 2" (4.5m)	15' 10" (5.0m)
Max. platform height	6' 6" (2.0m)	8' 2" (2.5m)	9' 10" (3.0m)
Overall length	3' 11" (1.19m)	3' 11" (1.19m)	3' 11" (1.19m)
Overall width	2' 4" (0.75m)	2' 4" (0.75m)	2' 4" (0.75m)
Stowed height	5' 6" (1.7m)	5' 10" (1.8m)	5' 10" (1.8m)
Platform capacity	529 lbs (240kg)	500 lbs (227kg)	430 lbs (195kg)
Max. wind speed	0 mph (0m/s)	0 mph (0m/s)	0 mph (0m/s)
Raise / lower time	8 / 14 seconds	13 / 17 seconds	19 / 26 seconds
Power source	12V DC battery	12V DC battery	12V DC battery
Weight	682 lbs (310kg)	770 lbs (350kg)	815 lbs (370kg)

	S3010E	S3210P	S3215L
Max. working height	15' 11" (5.0m)	32' (9.9m)	21' (6.6m)
Max. platform height	9' 11" (3.0m)	9' 10" (3.0m)	15' (4.6m)
Overall length	49' 6" (1.26m)	3' 11" (1.2m)	81" (2.1m)
Overall width	30' 3" (0.77m)	2' 8" (0.81m)	32' (0.81m)
Stowed height	5' 11" (1.8m)	5' 10" (1.8m)	75' 25" (1.9m)
Ground clearance	2' 3" (58mm)	n/a	2' 5" (63mm)
Platform capacity	500 lbs (227kg)	529 lbs (240kg)	670 lbs (305kg)
Inside turning radius	0° (0m)	n/a	4° (0.1m)
Gradeability	25%	n/a	25%
Weight	1,091 lbs (495kg)	1,036 lbs (470kg)	2,100 lbs (955kg)

SCISSOR LIFTS

BATTERY ELECTRIC SLAB



Snorkel S3210E

Snorkel S4732E

Features

- Self-propelled electric slab scissor lifts
- Ideal for low level construction or maintenance applications
- Compact and nimble

	S3215E	S3219E	S3220E
Max. working height	21' (6.6m)	25' (7.79m)	26' (8.1m)
Max. platform height	15' (4.6m)	19' (5.79m)	20' (6.1m)
Overall length	70' 4" (1.79m)	70' 4" (1.79m)	90' 6" (2.3m)
Overall width	32" (0.81m)	32" (0.81m)	32" (0.81m)
Stowed height	79" (2.02m)	83" (2.11m)	85' 25" (2.56m)
Ground clearance	2' 63" (66mm)	2' 63" (66mm)	3' 75" (95mm)
Platform capacity	600 lbs (272kg)	550 lbs (250kg)	900 lbs (409kg)
Inside turning radius	4° (0.1m)	4° (0.1m)	30° (0.76m)
Gradeability	25%	25%	25%
Weight	2,700 lbs (1,227kg)	3,170 lbs (1,438kg)	4,500 lbs (2,045kg)

	S3226E	S4726E	S4732E
Max. working height	32' (9.9m)	26' (7.9m)	38' (11.8m)
Max. platform height	26' (7.9m)	26' (7.9m)	32' (9.8m)
Overall length	90' 6" (2.3m)	90' 6" (2.3m)	90' 6" (2.3m)
Overall width	32" (0.81m)	47" (1.19m)	47" (1.19m)
Stowed height	90' 5" (2.3m)	90' 2" (2.3m)	94' 2" (2.39m)
Ground clearance	3' 75" (95mm)	2' 63" (66mm)	2' 63" (66mm)
Platform capacity	500 lbs (250kg)	1,000 lbs (454kg)	700 lbs (318kg)
Inside turning radius	30° (0.76m)	21° (0.53m)	21° (0.53m)
Gradeability	25%	25%	25%
Weight	5,000 lbs (2,268kg)	4,950 lbs (2,250kg)	5,925 lbs (2,693kg)

SCISSOR LIFTS

BATTERY ELECTRIC SLAB



Snorkel S3019E


Snorkel S4740E

Features

- Innovative electric slab scissor lifts
- Sunken scissor stack, all-electric drive, no hydraulic hoses (S3019E)
- Choose between electric or hydraulic drive (S4740E)

	S3019E	S4740E
Max. working height	25' (7.79m)	45' 5" (14.0m)
Max. platform height	19' (5.79m)	39' 5" (12.0m)
Overall length	75' (1.91m)	90' 6" (2.3m)
Overall width	30' 5" (0.77m)	47" (1.19m)
Stowed height	69' 1" (1.76m)	101" (2.56m)
Ground clearance	3" (76mm)	2' 63" (66mm)
Platform capacity	550 lbs (250kg)	550 lbs (250kg)
Inside turning radius	0° (0m)	21° (0.53m)
Gradeability	25%	25%
Weight	3,485 lbs (1,581kg)	6,825 lbs (3,100kg)

FIT TO BE COMPACT

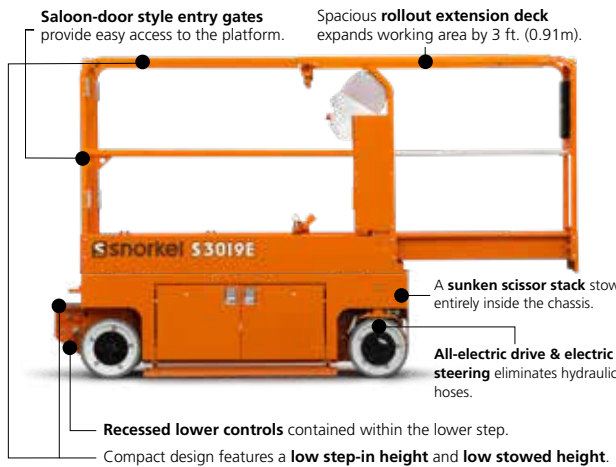

SCISSOR LIFTS

INTERNAL COMBUSTION & ELECTRIC NARROW ROUGH TERRAIN



Snorkel S2255RT

Snorkel S2755RT

Features

- Ultra-narrow width for accessing confined spaces
- Superb all-terrain performance
- Internal combustion, bi-energy or zero emission lithium-ion battery power

	S2255RT	S2755RT
Max. working height	27' 10" (8.5m)	33' 1" (10.1m)
Overall length	10' 10" (3.3m)	39' 5" (12.0m)
Overall width	4' 9" (1.45m)	4' 9" (1.45m)
Stowed height	7' 8" (2.35m)	8' 3" (2.5m)
Platform capacity	925 lbs (420kg)	660 lbs (300kg)
Weight	5,313 lbs (2,410kg)	6,062 lbs (2,750kg)

	S2255BE	S2755BE
Max. working height	27' 10" (8.5m)	33' 1" (10.1m)
Overall length	10' 10" (3.3m)	10' 10" (3.3m)
Overall width	4' 9" (1.45m)	4' 9" (1.45m)
Stowed height	7' 8" (2.35m)	8' 3" (2.5m)
Platform capacity	925 lbs (420kg)	660 lbs (300kg)
Weight	6,130 lbs (2,780kg)	6,835 lbs (3,100kg)

	S2255RTE	S2755RTE
Max. working height	27' 10" (8.5m)	33' 1" (10.1m)
Overall length	10' 10" (3.3m)	10' 10" (3.3m)
Overall width	4' 9" (1.45m)	4' 9" (1.45m)
Stowed height	7' 8" (2.35m)	8' 3" (2.5m)
Platform capacity	925 lbs (420kg)	660 lbs (300kg)
Weight	5,313 lbs (2,410kg)	6,062 lbs (2,750kg)

SCISSOR LIFTS

INTERNAL COMBUSTION & ELECTRIC COMPACT ROUGH TERRAIN



Snorkel S3370RT

Snorkel S2770RTE

Features

- Compact dimensions with roll-out deck extension
- Equipped with powerful 4-wheel drive
- Internal combustion, bi-energy or zero emission lithium-ion battery power

	S2770RT	S3370RT	S3970RT
Max. working height	33' (10.1m)	39' (12.0m)	45' (13.8m)
Overall length	11' (3.4m)	11' (3.4m)	11' (3.4m)
Overall width	5' 10" (1.8m)	5' 10" (1.8m)	5' 10" (1.8m)
Stowed height	8' 7" (2.61m)	9' (2.7m)	9' 8" (2.95m)
Platform capacity	1,250 lbs (580kg)	1,000 lbs (450kg)	771 lbs (350kg)
Weight	6,636 lbs (2,886kg)	7,980 lbs (3,620kg)	8,355 lbs (3,790kg)

	S2770BE	S3370BE	S3970BE
Max. working height	33' (10.1m)	39' (12.0m)	45' (13.8m)
Overall length	11' (3.4m)	11' (3.4m)	11' (3.4m)
Overall width	5' 10" (1.8m)	5' 10" (1.8m)	5' 10" (1.8m)
Stowed height	8' 7" (2.61m)	9' (2.7m)	9' 8" (2.95m)
Platform capacity	1,250 lbs (580kg)	1,000 lbs (450kg)	771 lbs (350kg)
Weight	7,024 lbs (3,186kg)	8,642 lbs (3,919kg)	9,017 lbs (4,090kg)

	S2770RTE	S3370RTE	S3970RTE
Max. working height	33' (10.1m)	39' (12.0m)	45' (13.8m)
Overall length	11' 3" (3.4m)	11' 3" (3.4m)	11' 3" (3.4m)
Overall width	5' 10" (1.8m)	5' 10" (1.8m)	5' 10" (1.8m)
Stowed height	8' 7" (2.61m)	9' (2.7m)	11' 3" (3.43m)
Platform capacity	1,250 lbs (580kg)	1,000 lbs (450kg)	771 lbs (350kg)
Weight	6,172 lbs (2,800kg)	7,980 lbs (3,620kg)	8,355 lbs (3,790kg)

SCISSOR LIFTS

INTERNAL COMBUSTION ROUGH TERRAIN



Snorkel S9043RT

Snorkel S9070RT-HC

Features

- Large deck, high capacity rough terrain scissor lifts
- Dual extension decks available (standard on HC models)
- Ideal for construction applications

	S9033RT	S9043RT	S9053RT
Max. working height	39' (11.8m)	49' (15.1m)	59' (17.9m)
Overall length (with stabilizers)	15' 7" (4.77m)	15' 7" (4.77m)	15' 7" (4.77m)
Overall width	7' 6" (2.28m)	7' 6" (2.28m)	7' 6" (2.28m)
Stowed height	9' (2.77m)	9' 10" (2.99m)	10' 6" (3.2m)
Platform capacity	2,500 lbs (1,135kg)	1,500 lbs (681kg)	1,500 lbs (681kg)
Weight (with stabilizers)	16,302 lbs (7,401kg)	17,946 lbs (8,147kg)	19,448 lbs (8,829kg)

	S9031RT-HC	S9043RT-HC
Max. working height	37' (11.4m)	49' (15.1m)
Overall length	16' (4.87m)	16' (4.87m)
Overall width	7' 6" (2.28m)	7' 6" (2.28m)
Stowed height	9' 1" (2.77m)	9' 1" (2.77m)
Platform capacity	4,000 lbs (1,814kg)	3,500 lbs (1,587kg)
Weight	15,000 lbs (6,803kg)	17,000 lbs (7,711kg)

	S9056RT-HC	S9070RT-HC
Max. working height	62' (19.1m)	76' (23.3m)
Overall length	16' (4.87m)	16' (4.87m)
Overall width	7' 6" (2.28m)	7' 6" (2.28m)
Stowed height	10' 2" (3.09m)	11' 3" (3.43m)
Platform capacity	2,500 lbs (1,134kg)	2,000 lbs (907kg)
Weight	20,000 lbs (9,072kg)	25,500 lbs (11,566kg)

SCISSOR LIFTS

INTERNAL COMBUSTION & ELECTRIC ROUGH TERRAIN



Snorkel SL26RT

Snorkel SL30RTE

Features

- Innovative "Speed Level" lift - available as diesel or lithium-ion electric
- Auto-levels without the need for outriggers
- Powerful 4-wheel drive for superb rough terrain capability

	SL26RT	SL30RT
Max. working height	31' 6" (10.0m)	35' 4" (11.0m)
Max. platform height	25' 6" (8.0m)	29' 4" (9.0m)
Overall length	4' 2" (1.26m)	4' 1" (1.37m)
Overall width	7' (2.13m)	7' (2.13m)
Stowed height	8' 6" (2.6m)	8' 6" (2.6m)
Ground clearance (chassis)	12" (305mm)	12" (305mm)
Platform capacity	1,500 lbs (680kg)	1,300 lbs (590kg)
Inside turning radius	12' 10" (3.9m)	12' 10" (3.9m)
Gradeability	50%	50%
Weight	7,826 lbs (3,500kg)	7,495 lbs (3,400kg)

	SL26RTE	SL30RTE
Max. working height	31' 6" (10.0m)	35' 4" (11.0m)
Max. platform height	25' 6" (8.0m)	29' 4" (9.0m)
Overall length	12' 5" (3.79m)	14' 1" (4.3m)
Overall width	7' (2.13m)	7' (2.13m)
Stowed height	8' 6" (2.6m)	8' 6" (2.6m)
Ground clearance (chassis)	12" (305mm)	12" (305mm)
Platform capacity	1,500 lbs (680kg)	1,300 lbs (590kg)
Inside turning radius	12' 10" (3.9m)	12' 10" (3.9m)
Gradeability	50%	50%
Weight	7,826 lbs (3,500kg)	7,605 lbs (3,450kg)

MAST LIFTS

PUSH AROUND



Snorkel UL25

Snorkel UL40

Features

- Robust push-around mast lifts
- Easy loader system for flatbed vehicle transport
- Compact dimensions

	UL25	UL32
Max. working height	30' 11" (9.6m)	37' 9" (11.7m)
Max. platform height	24' 11" (7.6m)	31' 9" (9.7m)
Overall length	4' 2" (1.26m)	4' 4" (1.32m)
Overall width	2' 5" (0.74m)	2' 5" (0.74m)
Stowed height	6' 6" (1.99m)	8' 3" (2.51m)
Stabilizer footprint	6' 10" x 6' 6" (2.06m x 1.99m)	6' 10" x 6' 6" (2.06m x 1.99m)
Max. wind speed	0 mph (0m/s)	0 mph (0m/s)
Weight (AC)	859 lbs (390kg)	959 lbs (435kg)
Weight (DC)	926 lbs (420kg)	1,025 lbs (465kg)

	UL40
Max. working height	46' (14.1m)
Max. platform height	40' (12.1m)
Overall length	4' 4" (1.32m)
Overall width	2' 5" (0.74m)
Stowed height	9' 6" (2.90m)
Stabilizer footprint	9' 8" x 9' 4" (2.95m x 2.85m)
Platform capacity	300 lbs (136kg)
Max. wind speed	0 mph (0m/s)
Weight (AC)	1,036 lbs (470kg)
Weight (DC)	1,102 lbs (500kg)

MAST LIFTS

SELF-PROPELLED



Snorkel TM16E

Snorkel MB20J

Features

- Versatile electric self-propelled mast lifts
- Telescopic mast design provided stability at height
- Compact dimensions for excellent maneuverability

	TM12E	TM16E
Max. working height	18' (5.65m)	22' (6.87m)
Max. platform height	12' (3.65m)	16' (4.87m)
Overall length	4' 6" (1.37m)	4' 6" (1.37m)
Overall width	2' 6" (0.76m)	2' 6" (0.76m)
Stowed height	5' 6" (1.67m)	6' 6" (1.98m)
Ground clearance	3" (76mm)	3" (76mm)
Platform capacity	500 lbs (227kg)	500 lbs (227kg)
Inside turning radius	0" (0m)	0" (0m)
Gradeability	25%	25%