

# SL26RT/SL30RT

## DIESEL SPEED LEVEL



- The original Speed Level sigma lift
- Climbs gradients of up to 50%
- Auto-levelling without the need for stabilizers
- Suitable for most terrains
- Powerful 4x4 drive
- Ideal for rough terrain or work at height on sloped ground

 **snorkel**<sup>TM</sup>  
[www.snorkellifts.com](http://www.snorkellifts.com)

## DIESEL SPEED LEVEL

# SL26RT/SL30RT



| DIMENSIONS                      | SL26RT            | SL30RT                  |
|---------------------------------|-------------------|-------------------------|
| Max. working height             | 31 ft 6 in        | 35 ft 4 in              |
| Max. platform height (A)        | 25 ft 6 in        | 29 ft 4 in              |
| Platform size (stowed)          | 5 ft 8 in x 12 ft | 5 ft 8 in x 13 ft 11 in |
| Platform size (extended) (E)    | 5 ft 8 in x 15 ft | n/a                     |
| Extension deck length           | 3 ft              | n/a                     |
| Overall width (D)               | 7 ft              | 7 ft                    |
| Overall length (C)              | 12 ft 5 in        | 14 ft 1 in              |
| Stowed height (B)               | 8 ft 6 in         | 8 ft 6 in               |
| Min. height (guardrails folded) | 65 in             | 65 in                   |
| Chassis ground clearance        | 12 in             | 12 in                   |
| Axle ground clearance           | 7.6 in            | 7.6 in                  |

| PERFORMANCE                   | SL26RT  | SL30RT      |
|-------------------------------|---|-------------|
| Platform capacity (SWL)       | 1,500 lbs   | 1,300 lbs   |
| Max. wind speed               | 28 mph  | 28 mph      |
| Max. drive height             | 25 ft 6 in  | 29 ft 4 in  |
| Max. drive speed (stowed)     | 4.0 mph   | 4.0 mph     |
| Max. drive speed (elevated)   | 0.5 mph   | 0.5 mph     |
| Raise/lower time              | 21/32 sec   | 24/36 sec   |
| Gradeability                  | 50%   | 50%         |
| Max. levelling, front to rear | 9°  | 9°          |
| Max. levelling, side to side  | 13°   | 13°         |
| Inside turning radius         | 12 ft 10 in   | 12 ft 10 in |
| Outside turning radius        | 18 ft 6 in  | 18 ft 6 in  |
| Tires                         | 26 x 12.00 - 12 foam filled                           |             |
| Controls                      | proportional joystick                                 |             |
| Drive system                  | 4-wheel drive with hydraulic motors and flow dividers |             |

| POWER        | SL26RT   | SL30RT |
|--------------|--|--------|
| Power source | Kubota D-902 water-cooled diesel engine - Tier 4 Final |        |

| WEIGHT | SL26RT    | SL30RT    |
|--------|-----------|-----------|
| Weight | 7,826 lbs | 7,495 lbs |

### LEVELING CAPABILITIES

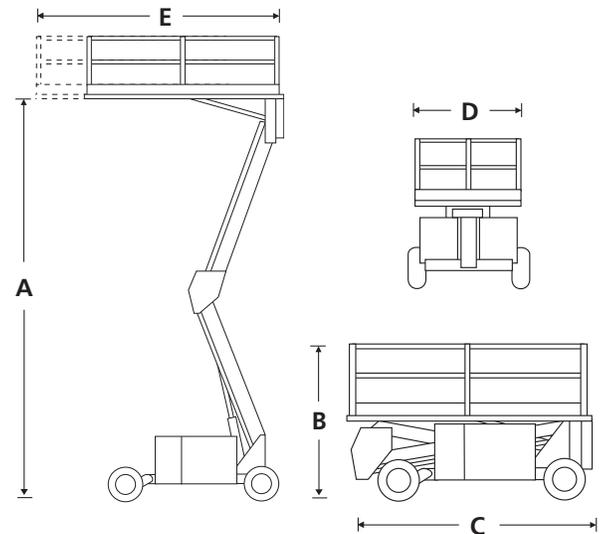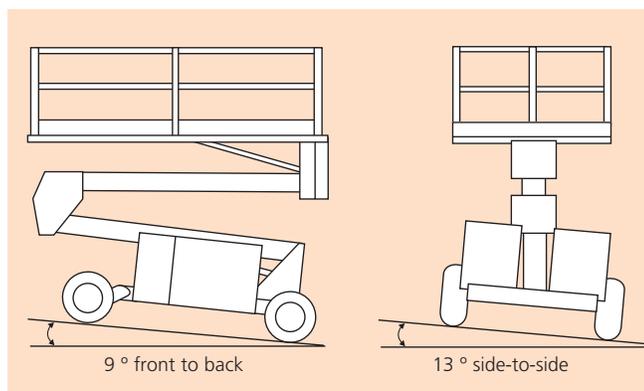

### STANDARD FEATURES

- Automatic powered platform levelling
- Powerful 4-wheel drive
- Oscillating front axle
- High grip, open tread deck (SL30RT only)
- Roll-out deck extension (SL26RT only)
- Descent alarm
- High grip, all-terrain tires
- Dual multi-disc brakes
- Proportional controls
- Flashing amber light
- Power line to platform
- Fold-down guardrails
- All motion alarm
- Hour meter & on-board diagnostics display
- Horn
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

### OPTIONS

- Special paint colors
- Hydraulic generator 110/240V 2kW
- Diesel exhaust scrubber
- Flashing amber light
- Extreme environment package
- Environmental hydraulic oil
- Tunnel package (RT)
- Non-marking tires
- Aluminum platform floor (SL26RT)
- Platform overload system
- Snorkel OnSite™ telematics

**snorkel** [www.snorkellifts.com](http://www.snorkellifts.com)

P.O. Box 1160  
 St. Joseph, MO 64502-1160, USA  
 Tel: 1 (785) 989-3000  
 Toll-free: 1 (800) 255-0317  
 Fax: 1 (785) 989-3070  
 Email: [sales.usa@snorkellifts.com](mailto:sales.usa@snorkellifts.com)